



and FINISHING PHASES

phase 4	phase 5
SECTION AFTER FIRST PAINTING STAGE MADE BY ANAPHORESIS	SECTION AFTER SECOND PAINTING STAGE



Uff. Pub. Fondital - CTC 04 P 211 - 02 Maggio 2013 (05/2013)



9PCGB04P211

Die cast aluminium radiators for high pressure heating systems



EN

PAINTING


phase 1	phase 2	phase 3
UNMACHINED SECTION	MACHINED SECTION	WASHING AND CHEMICAL TREATMENT OF THE SURFACES




FONDITAL S.p.A.
 25079 VOBARNO (Brescia) Italy
 Via Cerreto, 40 - Tel. +39 0365 878.31 - Fax +39 0365 878.576
 e mail: info@fondital.it - www.novafiorida.it

COMPANY WITH
 QUALITY SYSTEM
 CERTIFIED BY DNV
 = ISO 9001 =

The manufacturer reserves the right to make any modifications deemed necessary without prior notification.

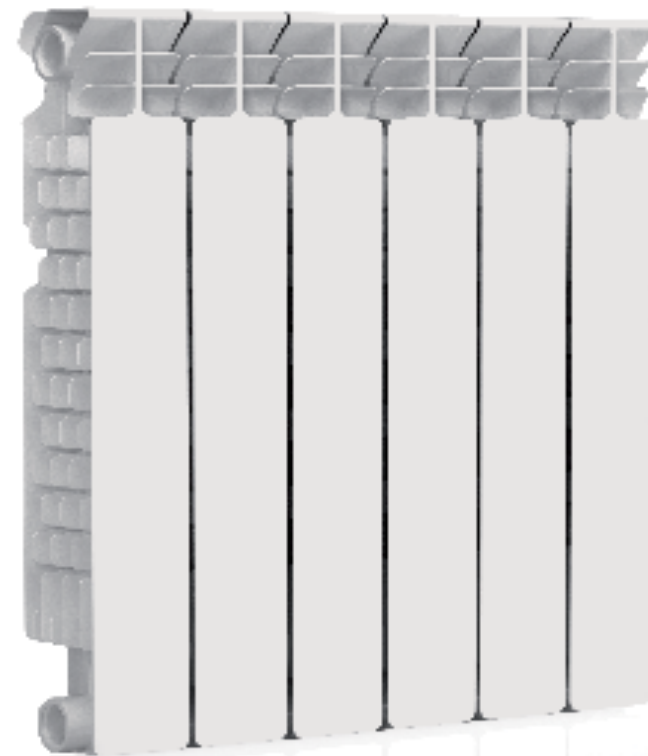

EVOLUTION: EXTRA THERM SUPER

Super is the new die-cast aluminium radiator by NOVA FLORIDA that features the following technological innovations:

- Ornamental patent.
- Innovative geometry of the 6 rows of side fins that was developed specially to result in a high heat output with a smaller surface area and hence less weight.
- Presence of rear openings allowing enhanced heat exchange by convection.
- A new cap for the element.

BRAND NEW CREATION

- Super is **more powerful** than the models in the S4 range.
- Super is **lighter** than the models in the S4 range, and hence easier to transport and install.
- Super has an **optimal weight-to-heat output ratio**.
- Super features **numerous exclusive technological innovations**.
- Super has an **innovative cap**.
- Super is a **top-of-the-range radiator!**



	Depth (C) mm	Height (B) mm	Centre distance (A) mm	Length (D) mm	Connection diameters inches	Water capacity litres/sect.	Exponent n	Coefficient K_m
350/100	97	407	350	80	G1	0.24	1.3054	0.5741
500/100	97	557	500	80	G1	0.31	1.3258	0.6978
600/100*	97	657	600	80	G1	0.38	1.3248	0.8065
700/100*	97	757	700	80	G1	0.40	1.3308	0.8669
800/100	97	857	800	80	G1	0.43	1.3372	0.9294

Heat output ΔT 30K W/sect.	Heat output ΔT 50K W/sect.
48.7	94.8
63.4	124.8
73.0	143.7
80.1	158.1
87.8	173.8



*Provisional data, certification pending

Maximum working pressure: 1600 kPa (16 bar)

Characteristic equation of the model $\Phi = K_m \Delta T^n$ (reference EN 442-1). The thermal efficiency values, expressed at ΔT 50K, comply with EN 442-2.

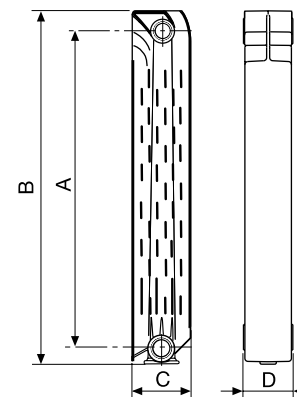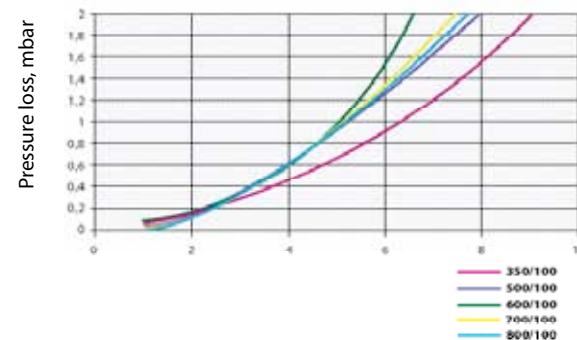

- The new cap is not welded and hydraulic seal is provided by an **O-ring seal**.
- The new cap is made of **aluminized steel**.
- **No welds, so no problems with burrs** at the bottom of the radiator.
- **All the caps** for the models in the Extra Therm Super range **undergo Aleternum® anticorrosion treatment**.

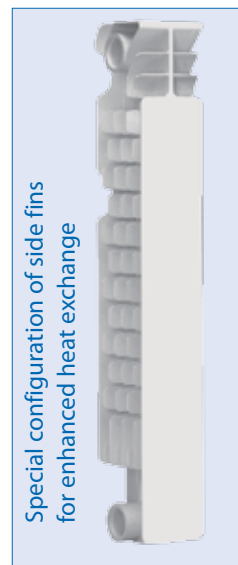

- new configuration of side fins for **higher heat output**
- new technical solution: **cap with no welding required**



EXTRA THERM SUPER



Fondital guarantees **Extra Therm Super** for **10 years** from the date of installation against all production defects providing the heating system is conform to the regulations, in compliance with the standards in force and provided the instructions on installation, use and correct maintenance supplied with the product have been observed.