



PRICE LIST
MAY 2017



ORO
TOWEL RAILS

STANDARD COLOUR:
WHITE RAL 9010



Price includes:

standard WHITE RAL 9010 painting and packaging.

Each package contains the following fittings (already included in the price):

- 1 fixing system to wall (4 pieces)
- 1 air vent 1/2"G, chromed • 2 adapters 1"G – 1/2"G, Rh
- 1 plug 1"G, Lh
- 1 adapter for air vent 1"G – 1/2"G, Lh
- 1 retaining rubber plug
- 4 special gaskets (O-RINGS) for plugs and adapters
- instruction for installation and maintenance

Model	Code	Width	Height	Centre distance	Length	Connection diameter	Water capacity	Heat output	Exponent	Coefficient	Price per piece
		mm	mm	mm	mm	inches	litres/sect.	W/sect.	n	K _m	€
8/450	EA89A014	40	800	450	490	G1	2.5	363	1.2207	3.0609	178.80
8/550	EA89H014	40	800	550	590	G1	2.9	423	1.2297	3.4475	187.70
12/450	EA89B014	40	1120	450	490	G1	3.8	506	1.2469	3.8517	234.50
12/550	EA89I014	40	1120	550	590	G1	4.2	607	1.2475	4.6073	244.90
15/450	EA89C014	40	1440	450	490	G1	4.6	643	1.2492	4.8494	293.90
15/550	EA89L014	40	1440	550	590	G1	5.3	763	1.2397	5.9716	308.80
19/450	EA89D014	40	1760	450	490	G1	5.8	796	1.2462	6.0784	354.80
19/550	EA89M014	40	1760	550	590	G1	6.7	933	1.2494	7.0312	370.80

Maximum working pressure: 600 kPa (6 bar).

The stated heat output values, expressed at ΔT 50K, comply with European standard UNI EN 442-2.

SAMOA
TOWEL RAILS

STANDARD COLOUR:
WHITE RAL 9010

Price includes:

standard WHITE RAL 9010 painting and packaging.

Each package contains the following fittings (already included in the price):

- 1 fixing system to wall (4 pieces)
- 1 air vent 1/2"G, chromed
- 2 adapters 1"G – 1/2"G, Rh
- 1 plug 1"G, Lh
- 1 adapter for air vent 1"G – 1/2"G, Lh
- 1 retaining rubber plug
- 4 special gaskets (O-RINGS) for plugs and adapters
- instruction for installation and maintenance

Model	Code	Width	Height	Centre distance	Length	Connection diameter	Water capacity	Heat output	Exponent	Coefficient	Price per piece
		mm	mm	mm	mm	inches	litres/sect.	W/sect.	n	K _m	€
8/450	EA890014	40	800	450	490	G1	2.5	362	1.2266	2.9861	174.30
8/550	EA89V014	40	800	550	590	G1	2.8	423	1.2252	3.5087	180.50
12/450	EA89P014	40	1120	450	490	G1	3.6	509	1.2412	3.9652	236.30
12/550	EA89Z014	40	1120	550	590	G1	4.1	602	1.2413	4.6872	246.20
15/450	EA89Q014	40	1440	450	490	G1	4.6	640	1.1175	8.0822	294.10
15/550	EA890014	40	1440	550	590	G1	5.2	748	1.2467	5.6963	306.20
19/450	EA89R014	40	1760	450	490	G1	5.7	791	1.2553	5.8268	357.30
19/550	EA89I014	40	1760	550	590	G1	6.6	932	1.2387	7.3298	373.20

Maximum working pressure: 600 kPa (6 bar).

The stated heat output values, expressed at ΔT 50K, comply with European standard UNI EN 442-2.





**STANDARD COLOUR:
WHITE RAL 9010**



Price includes:

standard WHITE RAL 9010 painting and packaging (fittings must be ordered separately).

For fixing the radiator on to the wall, the fixing system code A70 may be used – please order separately.

The item comes complete with instruction for installation and maintenance.

RADIATOR COMPOSITION (Standard assembly):				
CENTER DISTANCE	SECTIONS*			
350 ÷ 800	-	3	4	5
900 ÷ 2000	2	3	-	-

*Each section, 160 mm wide, is composed of two columns.

Model	Code	Width	Height	Centre distance	Length	Connection diameter	Water capacity	Heat output	Exponent	Coefficient	Price per section
		mm	mm	mm	mm	inches	litres/sect	W/sect	n	K _m	€
350	EA85A014	60	390	350	160	G1	0.480	117	1.3078	0.7019	46.00
500	EA85B014	60	540	500	160	G1	0.590	152	1.3104	0.9026	48.70
600	EA85C014	60	640	600	160	G1	0.678	175	1.3121	1.0323	51.50
700	EA85D014	60	740	700	160	G1	0.765	197	1.3139	1.1541	54.60
800	EA85E014	60	840	800	160	G1	0.850	219	1.3156	1.2741	55.90
900	EA85F014	60	940	900	160	G1	0.960	241	1.3174	1.3928	58.40
1000	EA85G014	60	1040	1000	160	G1	1.040	262	1.3191	1.5036	60.40
1200	EA85H014	60	1240	1200	160	G1	1.200	305	1.3226	1.7267	66.50
1400	EA85I014	60	1440	1400	160	G1	1.380	348	1.3261	1.9436	71.30
1600	EA85L014	60	1640	1600	160	G1	1.575	390	1.3296	2.1488	77.90
1800	EA85M014	60	1840	1800	160	G1	1.750	432	1.3331	2.3478	84.80
2000	EA85N014	60	2040	2000	160	G1	1.950	475	1.3365	2.5466	91.40

Maximum working pressure: 600 kPa (6 bar).

The stated heat output values, expressed at ΔT 50K, comply with European standard UNI EN 442-2.



**STANDARD COLOUR:
WHITE RAL 9010**



Price includes:

standard WHITE RAL 9010 painting and packaging (fittings must be ordered separately).

For fixing the radiator on to the wall, code A71 fixing system may be used – please order separately.

Standard assembly: in blocks of two or three sections (each section, 160 mm wide, is composed of two columns).

The item comes complete with instruction for installation and maintenance.

Model	Code	Width	Height	Centre distance	Length	Connection diameter	Water capacity	Heat output	Exponent	Coefficient	Price per section
		mm	mm	mm	mm	inches	litres/sect	W/sect	n	K _m	€
900	EA86A014	40	940	900	160	G1	0.94	173	1.2807	1.1534	54.30
1000	EA86B014	40	1040	1000	160	G1	1.02	191	1.3009	1.1767	55.40
1200	EA86C014	40	1240	1200	160	G1	1.23	226	1.2905	1.4533	58.30
1400	EA86D014	40	1440	1400	160	G1	1.42	260	1.2963	1.6315	62.50
1600	EA86E014	40	1640	1600	160	G1	1.60	295	1.2850	1.9377	69.20
1800	EA86F014	40	1840	1800	160	G1	1.82	326	1.2917	2.0829	75.30
2000	EA86G014	40	2040	2000	160	G1	1.93	358	1.3288	1.9803	84.00

Maximum working pressure: 600 kPa (6 bar).

The stated heat output values, expressed at ΔT 50K, comply with European standard UNI EN 442-2.



Price includes: standard WHITE RAL 9010 painting and packaging (fittings are not included and they must be ordered separately).

Each package includes: one retaining rubber plug (fitting code: A 30/1) and the instruction for installation and maintenance.

Standard assembly: in blocks of 3-4-5-6 sections.

Model	Code	Width	Height	Centre distance	Length	Connection diameter	Water capacity	Heat output	Exponent	Coefficient	Price per section
		mm	mm	mm	mm	inches	litres/sect	W/sect	n	K _m	€
900	88A014	90	966	900	80	G1	0.42	183	1.3669	0.8712	41.60
1000	88B014	90	1066	1000	80	G1	0.47	195	1.3740	0.9029	44.50
1200	88C014	90	1266	1200	80	G1	0.55	223	1.3711	1.0443	50.80
1400	88D014	90	1466	1400	80	G1	0.65	249	1.3682	1.1794	57.30
1600	88E014	90	1666	1600	80	G1	0.74	275	1.4005	1.1479	63.10
1800	88F014	90	1866	1800	80	G1	0.83	298	1.3623	1.4444	69.20
2000	88G014	90	2066	2000	80	G1	0.92	323	1.4007	1.3463	77.90

Maximum working pressure: 600 kPa (6 bar).

The stated heat output values, expressed at ΔT 50K, comply with European standard UNI EN 442-2.



Price includes: standard WHITE RAL 9010 painting and packaging (fittings are not included and they must be ordered separately).

Each package includes: one retaining rubber plug (fitting code: A 30/1) and the instruction for installation and maintenance.

Standard assembly: in blocks of 3-4-5-6 sections.

Model	Code	Width	Height	Centre distance	Length	Connection diameter	Water capacity	Heat output	Exponent	Coefficient	Price per section
		mm	mm	mm	mm	inches	litres/sect	W/sect	n	K _m	€
900	87F014	80	966	900	80	G1	0.42	176	1.3785	0.7990	39.40
1000	87G014	80	1066	1000	80	G1	0.47	190	1.3948	0.8110	43.20
1200	87H014	80	1266	1200	80	G1	0.55	217	1.3924	0.9350	47.50
1400	87I014	80	1466	1400	80	G1	0.65	241	1.3944	1.0303	51.70
1600	87L014	80	1666	1600	80	G1	0.74	266	1.4069	1.0829	58.40
1800	87M014	80	1866	1800	80	G1	0.83	289	1.3934	1.2403	65.20
2000	87N014	80	2066	2000	80	G1	0.92	312	1.3995	1.3075	71.20

Maximum working pressure: 600 kPa (6 bar).

The stated heat output values, expressed at ΔT 50K, comply with European standard UNI EN 442-2.



Accessories

Radiator valves and lockshield-valves

ALFA valves
1/2" radiator fitting



Type	Colour white/chrome	Price	Colour chrome	Price	Colour gold	Price
	Code	€	Code	€	Code	€
Square valve for iron pipe	8493051	54.70	8493052	57.40	8493053	93.30
Straight valve for iron pipe	8493061	60.60	8493062	63.20	8493063	99.60
Square lockshield-valve for iron pipe	8493031	42.80	8493032	45.20	8493033	73.00
Straight lockshield-valve for iron pipe	8493041	48.10	8493042	50.70	8493043	79.00
Square valve for copper/polyethylene/multilayer pipe	8493151	54.00	8493152	56.90	8493153	93.00
Straight valve for copper/polyethylene/multilayer pipe	8493161	59.60	8493162	62.40	8493163	98.00
Square lockshield-valve for copper/polyethylene/multilayer pipe	8493131	41.90	8493132	44.40	8493133	73.00
Straight lockshield-valve for copper/polyethylene/multilayer pipe	8493141	47.40	8493142	49.90	8493143	78.00

Note: Valves supplied without fitting.

BETA valves
1/2" radiator fitting



Type	Colour white/chrome	Price	Colour chrome	Price
	Code	€	Code	€
Square valve for iron pipe	8483351	72.20	8483352	78.10
Straight valve for iron pipe	8483361	78.10	8483362	84.30
Square lockshield-valve for iron pipe	8493531	44.70	8493532	44.70
Straight lockshield-valve for iron pipe	8493541	49.00	8493542	51.60
Square valve for copper/polyethylene/multilayer pipe	8483451	71.40	8483452	77.20
Straight valve for copper/polyethylene/multilayer pipe	8483461	77.20	8483462	83.40
Square lockshield-valve for copper/polyethylene/multilayer pipe	8493631	43.80	8493632	46.30
Straight lockshield-valve for copper/polyethylene/multilayer pipe	8493641	48.20	8493642	50.80

Note: Valves supplied without fitting.

GAMMA valves
1/2" radiator fitting



Type	Colour white/chrome	Price	Colour chrome	Price
	Code	€	Code	€
Square valve for iron pipe	8484351	42.80	8484352	44.50
Straight valve for iron pipe	8484361	47.10	8484362	48.90
Square lockshield-valve for iron pipe	8494531	31.80	8494532	35.40
Straight lockshield-valve for iron pipe	8494541	37.20	8494542	39.30
Square valve for copper/polyethylene/multilayer pipe	8484451	41.70	8484452	43.70
Straight valve for copper/polyethylene/multilayer pipe	8484461	46.20	8484462	48.10
Square lockshield-valve for copper/polyethylene/multilayer pipe	8494631	32.40	8494632	34.50
Straight lockshield-valve for copper/polyethylene/multilayer pipe	8494641	36.40	8494642	38.40

Note: Valves supplied without fitting.

ALFA and BETA fittings for copper pipes

Pipe size (Ø mm)	Colour chrome	Price	Colour gold	Price
	Code	€	Code	€
10	849381210	7.20	849381310	10.50
12	849381212	7.20	849381312	10.50
14	849381214	7.20	849381314	10.50
15	849381215	7.20	849381315	10.50



ALFA and BETA fittings for polyethylene pipes

Pipe size (inside - outside Ø)	Colour chrome	Price	Colour gold	Price
	Code	€	Code	€
12-16	849382212	7.40	849382312	9.60
13-18	849382213	7.40	849382313	9.60
14-18	849382214	7.40	849382314	9.60



ALFA and BETA fittings for multi-layer pipes

Pipe size (inside - outside Ø)	Colour chrome	Price	Colour gold	Price
	Code	€	Code	€
10-14	849383210	7.80	849383310	11.30
12-16	8493832115	7.80	8493833115	11.30



GAMMA fittings for copper pipes

Pipe size (Ø mm)	Colour chrome	Price
	Code	€
10	849481210	5.30
12	849481212	5.30
14	849481214	5.30
15	849481215	5.30
16	849481216	5.30



GAMMA fittings for polyethylene pipes

Pipe size (inside - outside Ø)	Colour chrome	Price €
	Code	€
12-16	849482212	5.70
13-18	849482213	5.70
14-18	849482214	5.70



GAMMA fittings for multi-layer pipes

Pipe size (inside - outside Ø)	Colour chrome	Price
	Code	€
10-14	849483210	6.90
12-16	8494832115	6.90



Thermostatic valve for BETA and GAMMA valves

Type	Colour white/chrome	Price
	Code	€
With liquid sensor	8480931	34.00



Accessories common to all radiators


			Price €
A 1/1	520201	1"G automatic air valve, chromed, RH	6.50
A 1/1	520202	1"G automatic air valve, chromed, LH	6.50
A 4/1	525014	1"G zinc plated and paint-coated plug, RH	1.10
	525114	1"G zinc plated and paint-coated plug, LH	
A 6/1	526014	Zinc-plated and paint-coated adapter 3/8 RH	1.00
	526214	Zinc-plated and paint-coated adapter 1/2 RH	
	526414	Zinc-plated and paint-coated adapter 3/4 RH	
	526114	Zinc-plated and paint-coated adapter 3/8 LH	
	526314	Zinc-plated and paint-coated adapter 1/2 LH	
A 8/1	526514	Zinc-plated and paint-coated adapter 3/4 LH	1.00
	525214	Zinc-plated and paint-coated valve plug 1/4 RH	
	525414	Zinc-plated and paint-coated valve plug 1/8 RH	
	525314	Zinc-plated and paint-coated valve plug 1/4 LH	
	525514	Zinc-plated and paint-coated valve plug 1/8 LH	
A 13	540024	Touch-up spray (White RAL 9010) cc 400	5.80
A 26/1	550090	Nipple wrench 1"G	20.30
A 30/1	521011	Rubber plug	0.30
A 33/1	521012	1"G special nipple for extruded radiators	0.35
A 40/2	560257	Plastic wrench for plugs and adapters	5.00



SPECIAL FITTINGS FOR:


Maior S/90

			Price €
A 16	550020	Bracket to wall mm 175	0.40
A 18	550035	Bracket to screw on to the wall, RH	0.53
A 18	550036	Bracket to screw on to the wall, LH	0.53
A 20	550037	Installation kit with two adjustable, coated brackets	5.60
A 32/1	530102	O-ring gasket for nipples, plugs and adapters	0.45
A 34/1	560100	Lower spacer support	3.80
A 36/4	570014	Towel rack for MAIOR S/90 radiators, 4 sections, white 9010	10.90
A 36/5	570024	Towel rack for MAIOR S/90 radiators, 5 sections, white 9010	11.40
A 36/6	570124	Towel rack for MAIOR S/90 radiators, 6 sections, white 9010	12.20
A 82	550110	Installation kit for radiators (1/2" reducers)	11.90

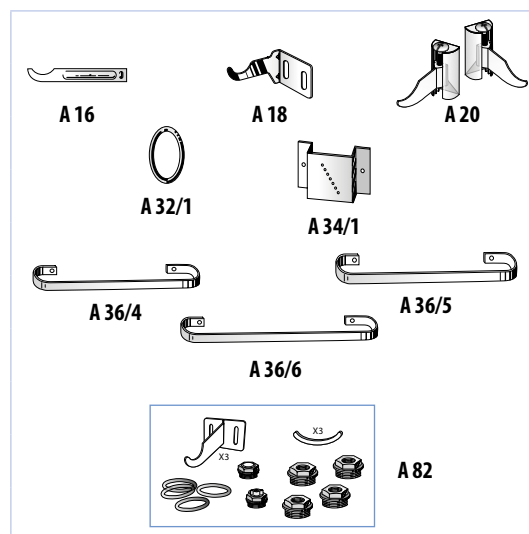


Maior Dual 80

			Price €
A 16	550020	Bracket to wall mm 175	0.40
A 18	550035	Bracket to screw on to the wall, RH	0.53
A 18	550036	Bracket to screw on to the wall, LH	0.53
A 20	550037	Installation kit with two adjustable, coated brackets	5.60
A 32/1	530102	O-ring gasket for nipples, plugs and adapters	0.45
A 34/1	560100	Lower spacer support	3.80
A 36/4	570014	Towel rack for MAIOR DUAL/80 radiators, 4 sections, white 9010	10.90
A 36/5	570024	Towel rack for MAIOR DUAL/80 radiators, 5 sections, white 9010	11.40
A 36/6	570124	Towel rack for MAIOR DUAL/80 radiators, 6 sections, white 9010	12.20
A 82	550110	Installation kit for radiators (1/2" reducers)	11.90

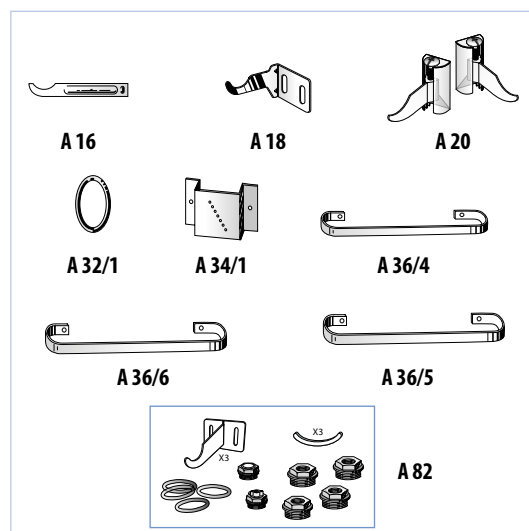


Horo R and Samoa Dual R towel rails

			Price €
A 31	530122	O-ring gasket for nipples, plugs and adapters	0.45
A 51	590051	Blister pack of wall fixings (4 sets included in the supply)	36.40
A 52	520203	1/2"G air valve, chromed (included in the supply)	1.95
A 53	528010	350 W electric resistance for mixed version	101.00
A 54	528011	500 W electric resistance for mixed version	105.00
A 55	528012	850 W electric resistance for mixed version	108.00

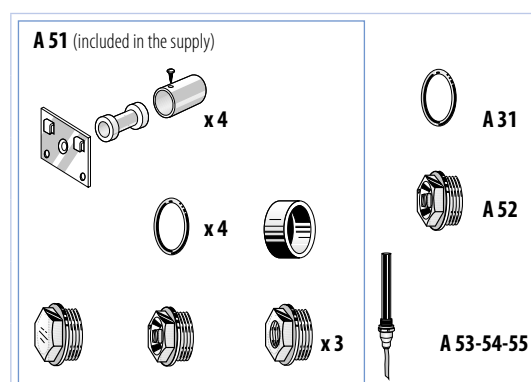


Horo R towel rails

			Price €
A 31	530122	O-ring gasket for nipples, plugs and adapters	0.45
A 70	590055	BLISTER PACK FOR WALL FIXINGS INCLUDING: - 3 fixing units (see diagram) - 1 rubber plug - 4 special O-ring seals	18.60

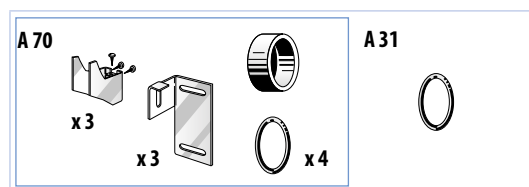

Samoa Dual R decorative radiators

			Price €
A 31	530122	O-ring gasket for nipples, plugs and adapters	0.45
A 71	590053	BLISTER PACK FOR WALL FIXINGS INCLUDING: - 4 fixing units, see diagram - 1 rubber plug - 4 special O-ring seals	23.75

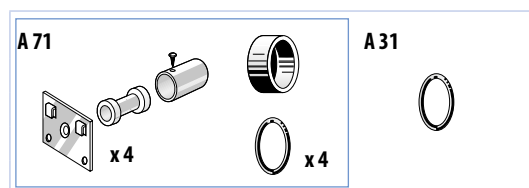

Notes:

The manufacturer reserves the right to implement modifications without notice.

Uff.Pub. Fondital - LUS 04 E 013 - 11 Maggio 2017 (05/2017)



FONDITAL S.p.A.

Via Cerreto, 40

25079 VOBARNO (Brescia) Italia

Tel.: +39 0365 878.31 - Fax: +39 0365 878.304

E-mail: info@fondital.it - Web: www.fondital.com

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV
= ISO 9001 =



9PLGB04E013